



- 1 High-quality TPE (thermoplastic elastomer) sealing**  
Compensate unevenness of wall construction

**Durable**  
Anodised surface for long-lasting high-grade visual appearance

**Easy to install**  
Simply adjustable and quick to fasten

- 2 Invisible Fixing**  
Innovative clip construction

Standard version	Joint width max. $b_f$ max [mm]	Total movement thermal $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Installation height $h$ [mm]
WJC 50	50	65 (+25/-40)	140	10
WJC 100	100	140 (+50/-90)	222	10
WJC 150	150	215 (+75/-140)	290	10
WJC 200 *	200	200 (+70/-130)	340	10

Corner version	Joint width max. $b_f$ max [mm]	Total movement thermal $\Delta b_f$ [mm]	Visible width $b_s$ [mm]	Installation height $h$ [mm]
WJC 50 E4	50	60 (+25/-35)	83	50
WJC 100 E4	100	135 (+50/-85)	165	50
WJC 150 E4	150	210 (+75/-135)	233	50
WJC 200 E4 *	200	200 (+70/-130)	273	65

\* Available on request.


**Joint width by the time of installation. Potential tolerance:  $\pm 10$  mm**

Further joint widths available on demand.

**Standard colour:** Aluminium anodised

Other Colours on request

**Production length:** 3 m

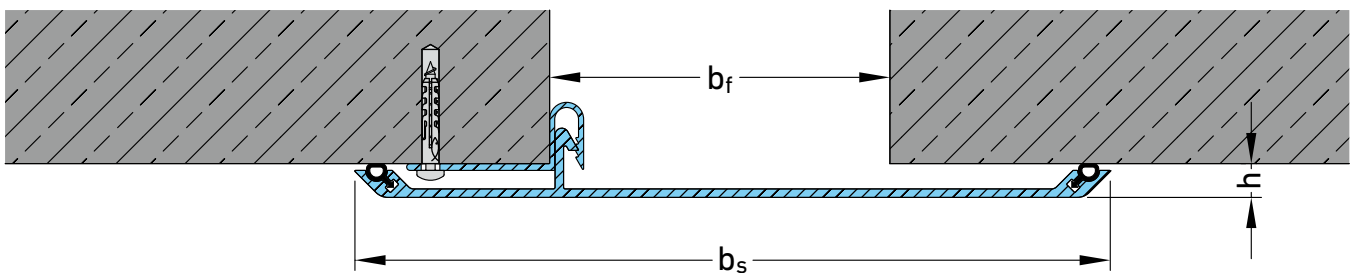

**Corner version:**

